



Automated Fuel Management at the Pump


FLOWrangler meets NEMA 1, 2, 4, 4X, 12, 13 and IP65 ratings. Enclosure is UL listed and tested to UL508-4X requirements.

System Requirements:

- Windows XP or Vista
- 32-bit processor
- Excel® , Dossier or other popular business programs capable of reading a CSV file.

Features:

- Supports over 1,200 users.
- Supports Key, Keyless **or** combination of Key with required data inputs.
- Key List will work in multiple yards.
- **12-volt DC** or 110-volt AC (220-VAC upon request) compatible for **controlling any electrical pump.**

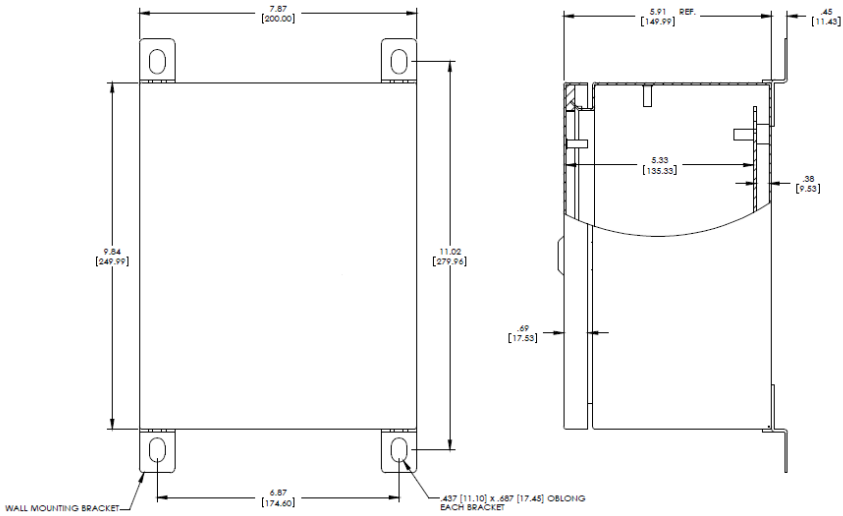

Environmental: FuelKeys

Operating Temperature	-40 to 185 degrees F
Storage Temperature	-40 to 185 degrees F
Humidity	5% to 100%
Power Requirements	000
Maximum Current	1.2 amps
Warranty	1 Year